






REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2021.05.24



XHB-2AS  
示意图

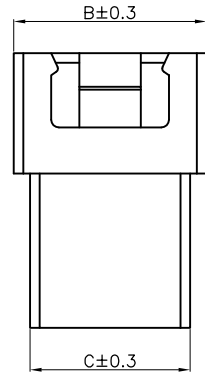

Specifications / 技术规格:

Current Rating: 3A

额定电流: 3A

Voltage rating: 250V AC,DC

额定电压: 250V AC,DC

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 1000V AC

耐电压: 1000V AC

Operating Temperature: -25°C to +85°C

工作温度: -25° C 到 85° C

Materials / 材料:

Insulation Material: PA or PBT UL94V-2 Natural

绝缘体塑胶材料: PA 或 PBT UL94 V-2 本色

孔数	A	B	C
2	2.50	7.50	5.80
3	5.00	10.00	8.30
4	7.50	12.50	10.80
5	10.00	15.00	13.30
6	12.50	17.50	15.80
7	15.00	20.00	18.30
8	17.50	22.50	20.80
9	20.00	25.00	23.30
10	22.50	27.50	25.80
11	25.00	30.00	28.30
12	27.50	32.50	30.80
13	30.00	35.00	33.30
14	32.50	37.50	35.80
15	35.00	40.00	38.30
16	37.50	42.50	40.80

 浙江快利电子有限公司  
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X.: ± 3'	X.: ± 0.35
.X: ± 2'	X.X: ± 0.25
.XX: ± 1'	X.XX: ± 0.15
.XXX: ± 0.5'	X.XXX: ± 0.10

DESIGN: 王鑫

DATE: 2021-05-24

DWG. NO.

TITLE.

CHECKED:

DATE:

PART NO.

XHB-NAS

APPROVED:

DATE:

KL-XHB-NAS

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	